



# **SLK-R680-WIFI**


## **Industrial Wifi6 Router**

### **Data Sheet**

Version: V1.1

Date: 11/20 2021

## Product Introduction

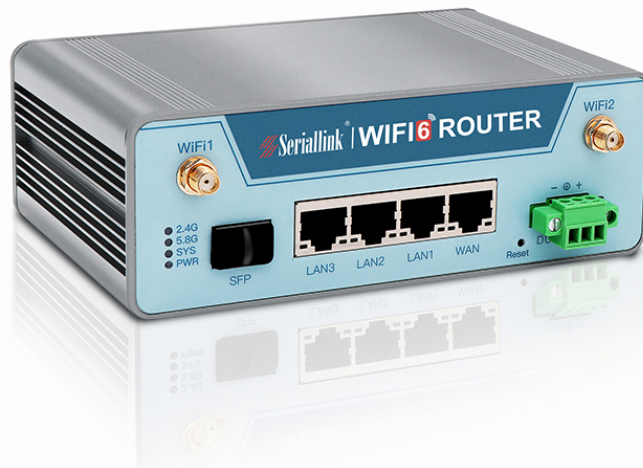

### Introduction:

SLK-R680-WIFI is a multi-functional wireless WiFi6 Router with high-performance 4-core CPU, high power WiFi6, Supports 4x 1000M Ethernet ports, which can be configured as LAN/WAN ports, you can choose DC48V POE power out version, 2X2 MIMO 2.4G /5.8G WiFi6, Supported AP, Client Work mode etc. It also adopts wide temperature, wide voltage input and EMC test with electromagnetic compatibility.

Has been widely used in the Internet of things industry chain of M2M industry, such as self-service terminals, smart grid, smart transportation, smart home, financial, mobile POS terminals, supply chain automation, industrial automation, intelligent buildings, fire control, public security, environmental protection, meteorology, digital medical treatment, telemetry, agriculture, forestry, water, coal, petrochemical and other fields.

### Features:

- ✓ Qualcomm Quad-core CPU/ 1.2GHz, 8Gb DDR3, 4GB eMMC
- ✓ 802.11ac mode: PHY rate: 866.7 Mbps (5 GHz) and 400 Mbps (2.4 GHz)  
or proprietary PHY rate: 1083 Mbps (5 GHz) and 500 Mbps (2.4 GHz)
- ✓ 802.11ax mode: PHY rate: 1201 Mbps (5 GHz) and 573.5 Mbps (2.4 GHz)
- ✓ Wi-Fi supports supported IEEE802.11ac, IEEE802.11ax
- ✓ 4 x 10/100/1000M Ethernet LAN /WAN Ports (RJ45 Connector)
- ✓ 1x 1000M SFP Optical Fiber Interface
- ✓ 48V POE output (optional)
- ✓ DIN35MM Rail Install

**Details:**
**Hardware :**

Hardware	
CPU	Qualcomm Quad-core CPU/ 1.2GHZ
RAM	8Gb
eMMC	4GB
OS	LINUX /OpenWRT

**WIFI Performance:**

WIFI supported	
Wireless	High power WiFi performance On-board 2x2 2.4GHz 802.11b/g/n, max 21dBm per chain @-35dB DEVM On-board 2x2 5GHz 802.11a/n/ac/ax/max 20dBm per chain @-40dB DEVM
Frequency	2.412GHz to 2.472GHz and 5.150GHz to 5.825GHz, simultaneous dual band
WIFI Rate	2x2 MU-MIMO On-board WiFi 2.4GHz radio, up to 574Mbps physical data rate, TCP data up to 400Mbps
	2x2 MU-MIMO On-board WiFi 5GHz radio, up to 1201Mbps physical data rate, TCP data rate up to 800Mbps
Modulation Techniques	802.11b: DSSS (DBPSK / DQPSK / CCK) 802.11a/g: OFDM (BPSK / QPSK / 16-QAM / 64-QAM) 802.11ac/n: OFDM (BPSK / QPSK / 16-QAM / 64-QAM / 256-QAM) 802.11ax: OFDM 1024QAM

**Router characteristics:**

Router characteristics	
Firewall	Network Address Translation (NAT)
	State full Packet Inspection (SPI)
Media Access Control	CSMA/CA with ACK
WiFi	AP, Client
VPN protocol	PPTP,L2TP ,OpenVPN Client, SERIALLINK VPN Client
DHCP	Build-in DHCP (Dynamic Host Configuration Protocol)
Others protocol	Supported PPP,PPOE, DDNS,ICMP,VRRP etc

**Interface:**

Interface	
LAN/WAN Ports	4 x 10/100/1000M LAN/WAN ports(RJ45 Connector)
Optical Fiber Interface	1x 1000M SFP Interface
Reset	1x Reset
LED	Power-SYS-2.4G WiFi-5.8G WIFI - LEDs

<b>POE Ethernet out</b>	Supported 48V POE output(optional)
<b>WiFi Interface</b>	2X 2.4G&5.8G SMA WIFI Antenna interface

**Power interface :**

<b>Power</b>	
<b>Default power</b>	DC 12V/2A power adapter (US,EU etc stander option)
<b>Input VDC</b>	12~55VDC
<b>Power Consumption</b>	18W (Max)

**Physical property:**

<b>Physical property:</b>	
<b>Operating Temperature</b>	Storage Temperature: (-40°C to 85°C) Operating Temperature: (-40°C to 75°C)
<b>Relative Humidity</b>	95%
<b>Size</b>	L*S*H: 144mm x94mm x 50mm
<b>Weight</b>	Net weight:556g Packing weight: 987kg
<b>Certification</b>	CCC,CE,FCC,RHOS


**Others:**

<b>Warranty</b>	2 years
-----------------	---------

**Order information:**

<b>Model</b>	SLK-R680-WiFi Router,2xWIFI antennas,1x 12V/2A Power adapter,1x RJ45 Cable
<b>SLK-R680-WIFI</b>	
<b>SLK-R680-WIFI(POE)</b>	SLK-R680-WIFI(POE) Router,2xWIFI antennas,1x 52V/1.5A Power adapter , 1x RJ45 Cable

Product size drawing  
Unit: mm

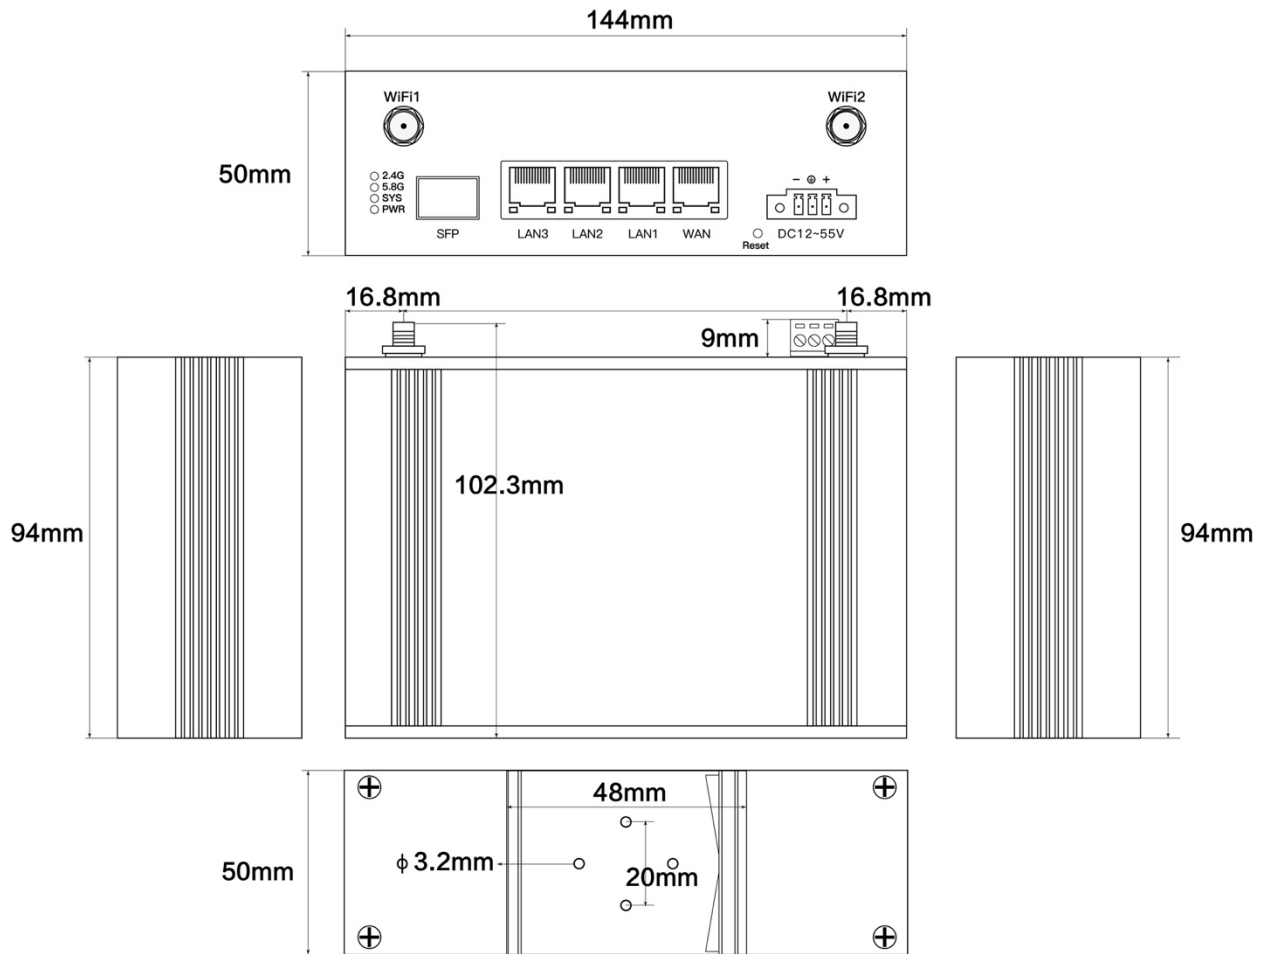

Thank you for your support of SERIALLINK products.

If you have any questions, please email: [info@seriallink.net](mailto:info@seriallink.net) or [www.seriallink.net](http://www.seriallink.net)